

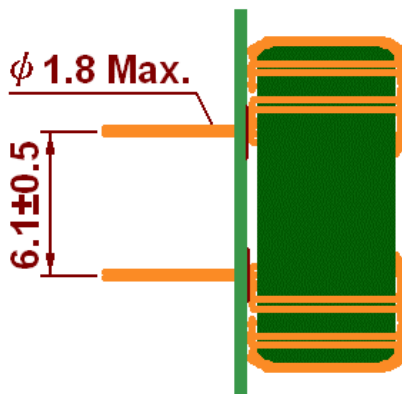
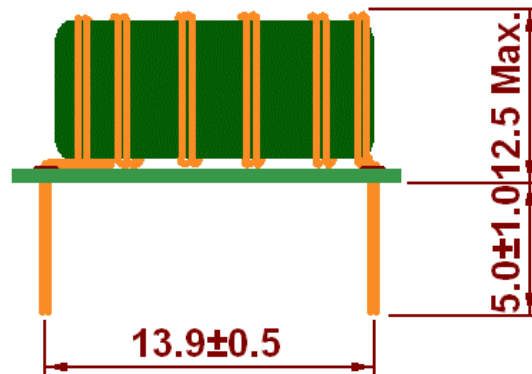


TCK-086

SIDE VIEW



TOP VIEW

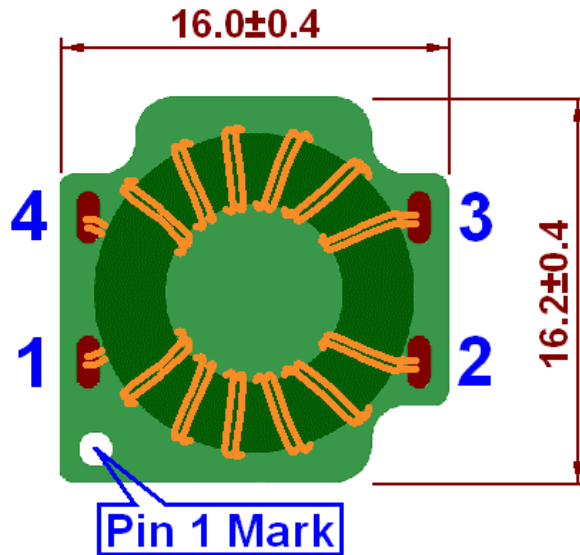

FRONT VIEW

All dimensions in mm

SPECIFICATIONS

Inductance	Pin 1-2: 156μH ±35% Pin 3-4: 156μH ±35%
	Test Condition: 100KHz/100mV Measurement Instrument: HP 4263B LCR Meter
Impedance	DCR(Max): 2.50 mΩ
	Measurement Instrument: HIOKI 3540 mΩ HITESTER
Rated Current	IDC(Max): 25.0A
	Measurement Instrument: Agilent 34401A Meter
Rated voltage	500Vdc
Operating temperature	-40°C ~ +105°C
Recommended Through Hole	φ 2.0 mm